


40W DeskTop Li-Ion/Li-Polymer Battery Charger LI4007 series



★ Features:

- ⊕ 3 step charge control
- ⊕ Universal AC input / Full range
- ⊕ Low standby power <0.5W
- ⊕ Constant current and voltage (CC,CV mode)
- ⊕ Suitable for continue load
- ⊕ Charges 1-7 Li-ION battery cells
- ⊕ Protections: Short circuit/Overload /Over volt./Over temp.
- ⊕ 2 colors LED indicate for charging status
- ⊕ Fully enclosed plastic case
- ⊕ High reliability
- ⊕ Approvals: UL / CUL / GS-TUV / C-Tick / FCC / SAA / PSE / KC / CE / CCC
- ⊕ 3 years warranty



SPECIFICATION

ORDER NO.	FC0503500	FC0903500	FC1503000	FC1802500	FC2102000	FC2551500	FC2901500	
CELL COUNT	1	2	3	4	5	6	7	
OUTPUT	DC VOLTAGE SET AT	4.2V	8.4V	12.6V	16.8V	21.0V	25.2V	29.4V
	RATED CURRENT	3.5A	3.5A	3.0A	2.5A	2.0A	1.5A	1.3A
	CURRENT RANGE	0~3.5A	0~3.5A	0~3.0A	0~2.5A	0~2.0A	0~1.5A	0~1.3A
	RATED POWER	14.7W	29.4W	37.8W	42.0W	42.0W	37.8W	38.22W
	RIPPLE&NOISE (Max)	200mVp-p	200mVp-p	200mVp-p	200mVp-p	200mVp-p	200mVp-p	200mVp-p
	CHARGING VOLTAGE RANGE	3.0~4.2V	5.4~8.4V	8~12.6V	10~16.8V	13.5~21V	15~25.2V	17.5~29.4V
	LED INDICATOR	RED: Charging GREEN: Charge completed/Standby						
	SETUP, RISE, HOLD UP TIME	200ms, 50ms, 16ms at full load						
INPUT	VOLTAGE RANGE	90~264VAC 127~370VDC						
	FREQUENCY RANGE	47~63Hz						
	AC CURRENT (Max.)	3.2A/115VAC 2.8A/230VAC						
	INRUSH CURRENT(max.)	60A/230VAC						
	LEAKAGE CURRENT (max.)	0.25mA/240VAC						
PROTECTION	OVERLOAD	90~110% Constant current mode and over 300% pulsing mode Protection type: Constant current limiting, recovers automatically after fault condition is removed						
	OVER VOLTAGE	110~135% rated output voltage Protection type: Clamp by zener diode						
	OVER TEMPERATURE	ICTj130℃ Protection type: Shut down o/p voltage, recovers automatically after temperature goes down						
	ENVIRONMENT	WORKING TEMP.	0~+50℃ (Refer to output load derating curve)					
	WORKING HUMIDITY	20%~90% RH non-condensing						

FUYUAN ELECTRONIC (HK) CO LIMITED

Tel: 00852-30779997 FAX: 00852-30779998


E-mail: sales@e-fuyuan.com info@e-fuyuan.com http://www.e-fuyuan.com

Add: UNYI 04, 7/F, BRIGHT WAY TOWER, NO. 33 MONG KOK ROAD, KOWLOON, HONG KONG.


40W DeskTop Li-Ion/Li-Polymer Battery Charger **LI4007 series**

	STORAGE TEMP.,HUMIDITY	-20~+85℃, 10~95% RH	
	TEMP. COEFFICIENT	±0.03% / ℃ (0~50℃)	
	VIBRATION	10~500Hz, 2G 10min./1cycle, period for 60min. each along X,Y,Z axes	
	SAFETY & EMC	UL60950-1, CSA22.2, EN60950-1, J60950, K60950, AS/NZS60950, GB4943 Approved	
	WITHSTAND VOLTAGE	I/P-O/P: 3KVAC(2Pin); I/P-O/P: 1.5KVAC(3Pin)	
	ISOLATION RESISTANCE	I/P-O/P: 100M Ohms / 500VDC / 25 ℃ / 70% RH	
	EMI CONDUCTION & RADIATION	Compliance to EN55022(CISPR22) Class B, FCC part 15 Class B	
	HARMONIC CURRENT	Compliance to EN61000-3-2,3	
	EMS IMMUNITY	Compliance to EN61000-4-2,3,4,5,6,11, Light industry level, criteria A	
	OTHERS	DIMENSION	110*48.5*31mm(L*W*H)
	PACKING	140g; 100pcs/14kg/CARTON	
	CONNECTOR	5.5*2.1*10mm, center positive; Other type available by customer requested	


CHARGE CURVE

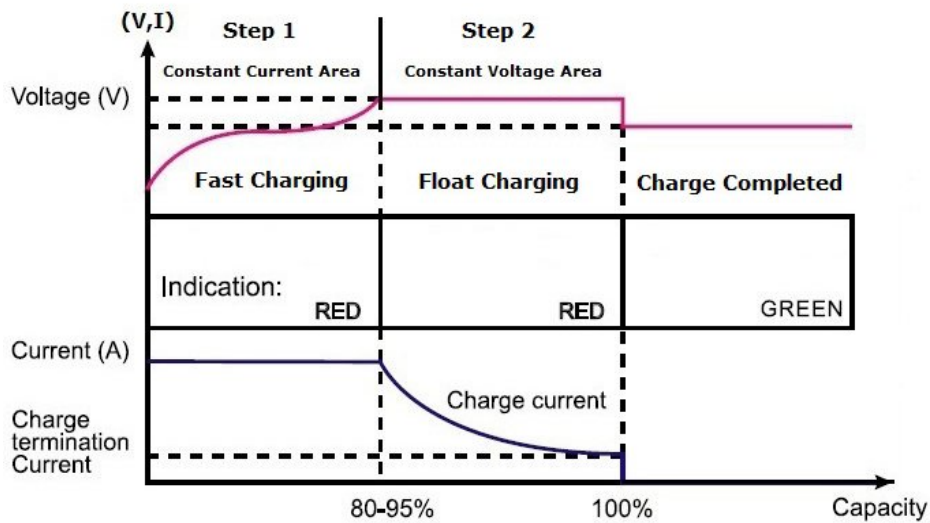

Derating Curve

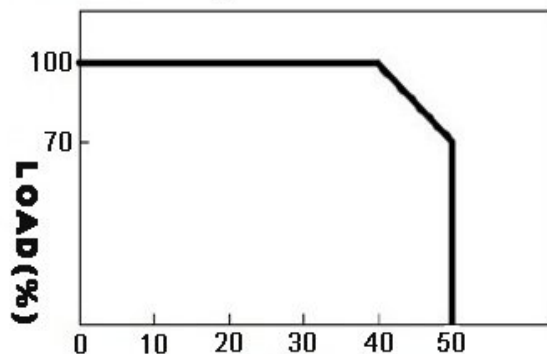

Static Characteristics

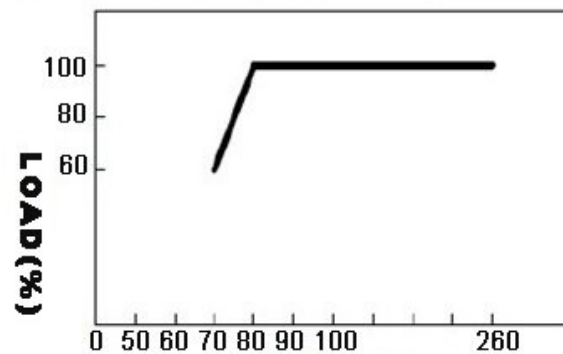

FUYUAN ELECTRONIC (HK) CO LIMITED

Tel: 00852-30779997 FAX: 00852-30779998

E-mail: sales@e-fuyuan.com info@e-fuyuan.com <http://www.e-fuyuan.com>

Add: UNYI 04, 7/F, BRIGHT WAY TOWER, NO. 33 MONG KOK ROAD, KOWLOON, HONG KONG.